


# SMART FUEL FILTER


FUEL FILTER - WATER SEPARATOR - INTEGRAL WATER PROBE

**SFK AG2 SS**

## TOP VIEW

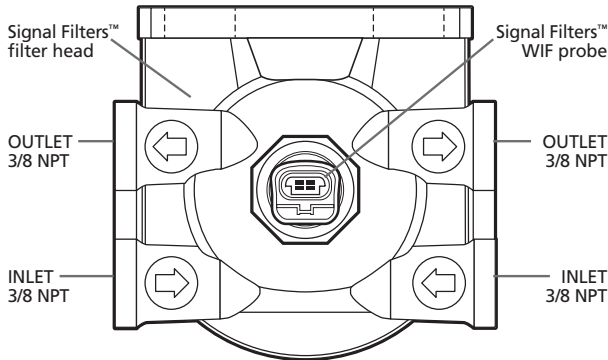


## FRONT VIEW

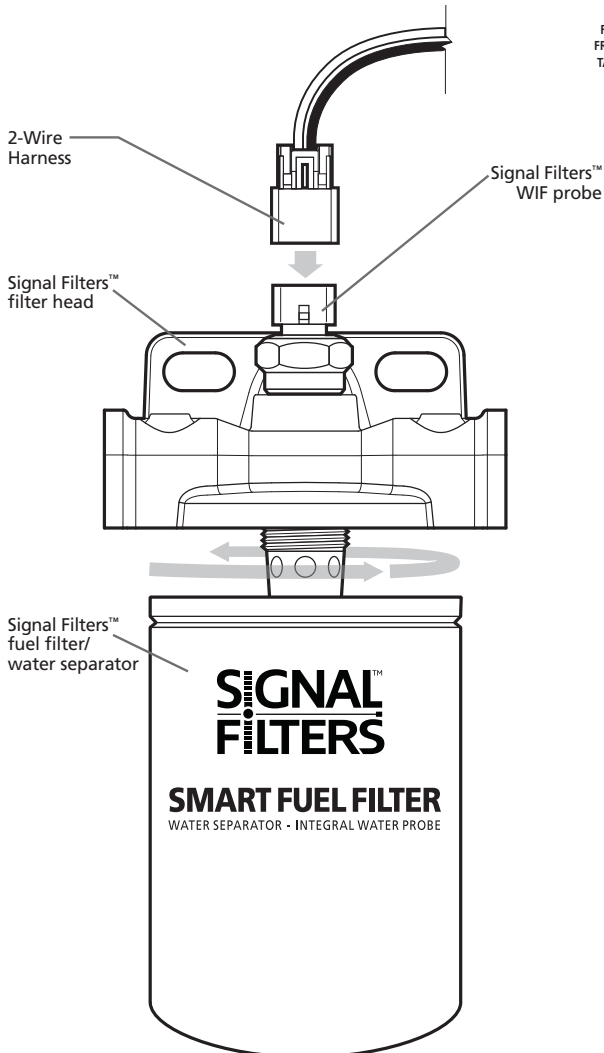

## BEFORE INSTALLING:

1. Be sure engine is turned off and fuel hoses are temporarily clamped tight.
2. Be sure to follow all OSHA safety precautions before installing the Signal Filters™ fuel filter system.

## INSTALLATION DIAGRAM:

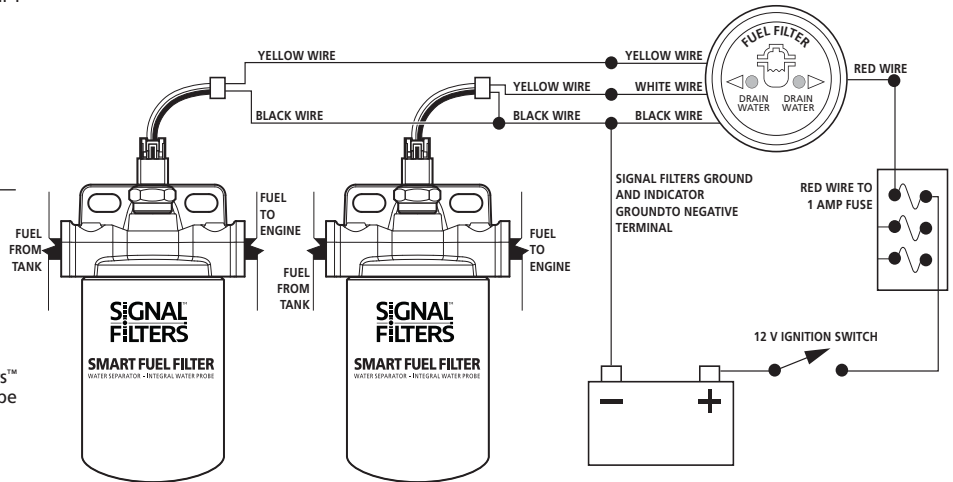

## FILTER HEAD INSTALLATION:

1. Connect fuel hose from fuel tank to Signal Filters™ filter head INLET.
  2. Connect fuel hose from Signal Filters™ filter head OUTLET to engine.
  3. Insert plugs for unused INLET and OUTLET.
  4. Connect Wire harness to WIF probe on Signal Filters™ filter head.
  5. YELLOW WIRE from 1st Signal Filters™ HARNESS connects to YELLOW WIRE from indicator.
  6. YELLOW WIRE from 2nd Signal Filters™ HARNESS connects to WHITE WIRE from indicator.
  7. BLACK WIRES from BOTH Signal Filters™ HARNESSES connects to BLACK WIRE from INDICATOR to negative terminal on battery (Ground).
  8. RED WIRE from INDICATOR connects to 1 AMP FUSE.
- See wiring diagram above for complete electrical connections.

Go to website for more info: [SignalFilters.com](http://SignalFilters.com)

Signal Filters™ is a registered trademark of and manufactured by Entratech Systems LLC | [SignalFilters.com](http://SignalFilters.com)